

Quick Configuration Guide v1.0



iOS/Android

1.Step Power on

1.1 Power on the machine to ensure that all part of the machine are running normally.

2.Step Download the Wattseek APP

2.1 Scan the QR code on the left to download the Wattseek APP.




2.2 You can search for Wattseek in Apple Store or Google Play to download.

3.Step Register

3.1 Run the Wattseek APP to go to the registration page.

3.2 Fill in the registration information according to the prompts on the page and click 'Register'.

3.3 Click 'Confirm' to start using.

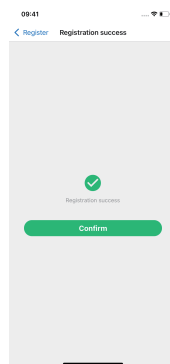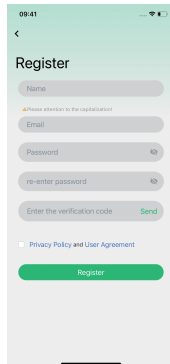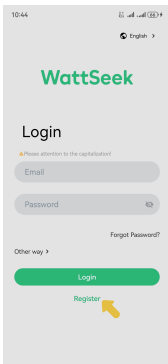





4.Step Network mode configuration

4.1 Use the Wattseek APP to enter the 'Serve' module and click on 'Network Configuration'.

4.2 Go to Bluetooth Connect and click on the Bluetooth name that matches the inverter's serial number.

4.3 Wait for the Bluetooth connection to be successful, and you will be directed to the network configuration.

4.4 You can check the WiFi status and select the WiFi network, enter the Wi-Fi password, and click 'Connect' in the Wi-Fi Information section.

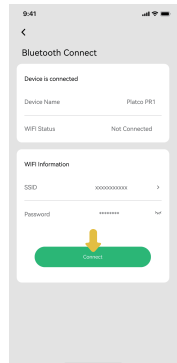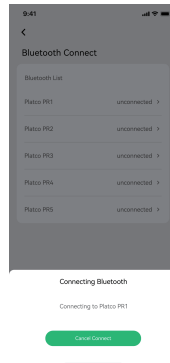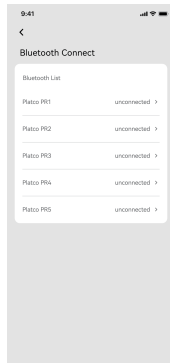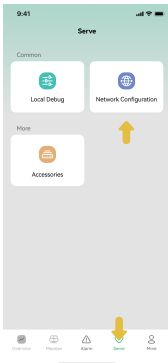


5.Step Create site with SN

5.1 Logging in and entering the APP, click 'Overview' to enter the page of adding site.

5.2 Click the 'Create with SN' button to quickly create a site, or you can jump to Step 6, click the 'Create Site' button to create a site by using the common process.


5.3 You can choose to scan the QR code or barcode to obtain the SN number or manually enter the SN number, then click 'Confirm'.

5.4 Click 'Confirm' to creat the site successfully, then you can skip Step 6 and start using the site.

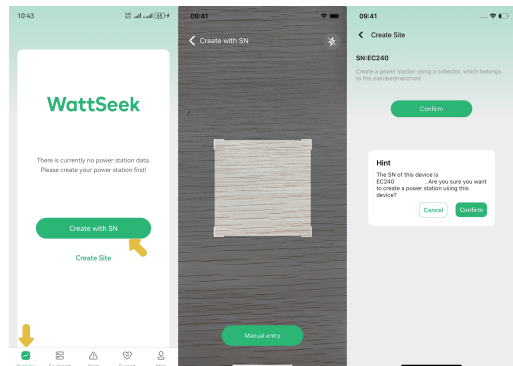

6.Step Create site, add inverter to site

6.1 Click the 'Create Site' button to create a site, and enter the site information as prompted.

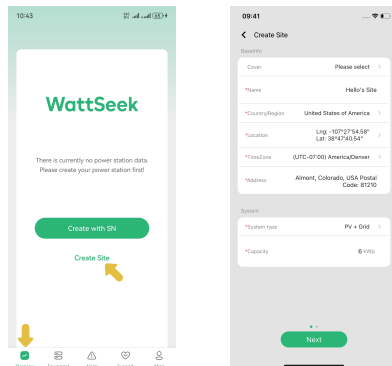


6.Step Create site, add inverter to site

6.2 After creating the site, bind the inverter to the site by first entering the designated site.

6.3 Click on the device navigation bar and then click on the 'Add Device' button in the top right corner.

6.4 You can choose to scan the QR code to obtain the SN number or manually enter the SN number, then click on 'Add'.

6.5 Refresh the device list to check if the datalogger status is 'normal', indicating a successful binding.

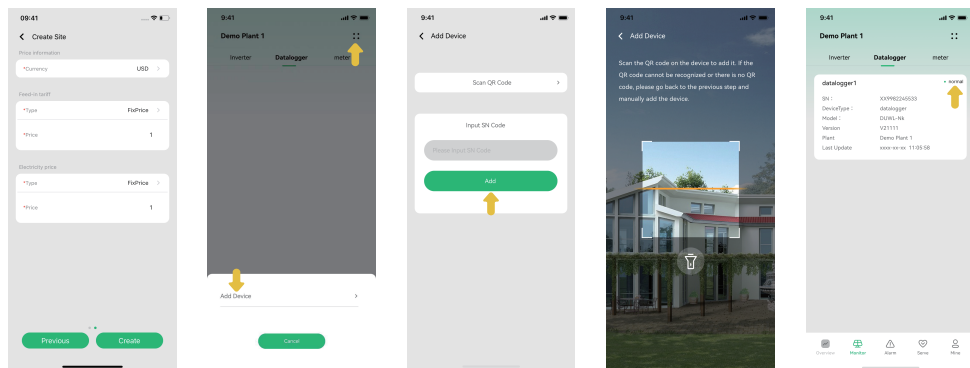

7.Step Frequently asked questions

7.1 What is the router frequency band supported by the inverter?

- Only 2.4GHz band WiFi signals are supported, not 5GHz.
- Please check if your router's current frequency band includes 2.4GHz.

7.2 Why does the distribution network fail?

- The location permissions and Bluetooth permissions for the phone and Wattseek APP may not be successfully turned on.